



podziałka	wewn. szerokość	śr. rolki	śr. sworznia	dł. sworznia	wys. wewn. płytki	gr. wewn. płytki	gr. zewn. płytki	waga	wytrzyma.	elem. łączące					
a	p	b1 (min)	d1 (max)	d2 (max)	b4 (max)	h2 (max)	T1	T2	q	FB (min)	B	A	E	Ep	C
	mm	mm	mm	mm	mm	mm	mm	mm	kg/m	N					
420	12,70	6,40	7,75	4,18	16,60	12,00	1,80	1,80	0,70	15 300	?	?	?		
428	12,70	7,75	8,51	4,45	17,80	12,00	1,80	1,60	0,80	22 000	?	?	?		
428 SP	12,70	7,75	8,51	4,45	18,10	12,00	1,80	1,60	0,81	22 500	?	?	?	?	
520 M	15,875	6,48	10,16	5,30	18,20	14,50	2,20	2,00	0,84	33 000	?	?	?		?
520 H	15,875	6,48	10,16	5,30	18,50	14,50	2,20	2,20	1,6	36 000	?	?	?		
520 GT	15,875	6,48	10,16	5,30	17,30	13,10	1,90	1,90	0,79	27 400	?	?	?		?
520 GT X	15,875	6,48	10,16	5,30	17,30	13,10	1,90	1,90	0,79	28 000	?	?	?	?	?
520 MX	15,875	6,48	10,16	5,30	18,50	14,50	2,20	2,00	0,84	34 000	?	?	?	?	?
520 RD	15,875	6,48	10,16	5,30	18,50	14,50	2,20	2,00	0,95	33 500	?	?	?		
520 RD Z	15,875	6,48	10,16	5,30	18,50	14,50	2,20	1,60	0,95	32 000	?	?	?		


420, 428, 428 SP, 520 GT, 520 GTX, 520 H, 520 M, 520 MX

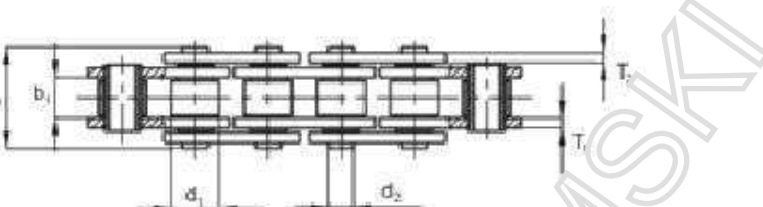


520 RD

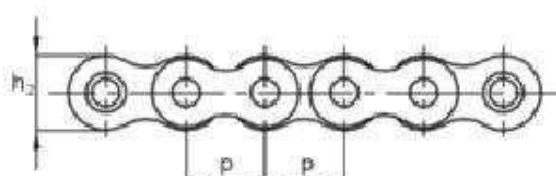

520 RDZ

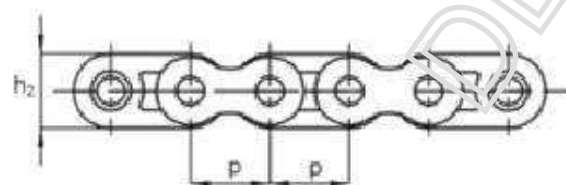

B

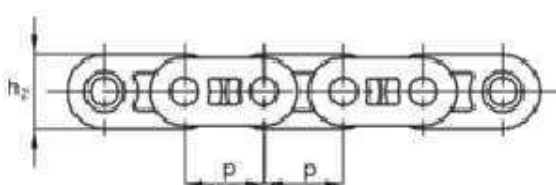

A

E

Ep

C

